

KVD-82 Stainless Steel Keyboard with 16 mm Key Pitch

Rear Panel Version with long-travel Keys and Stainless Steel Trackball.






Description

The stainless steel rear panel version is vandalproofed and comes with long-travel keys and an integrated 25 mm [Trackball](#). It is ideal for integration in rough and difficult environments.

Features

- Keyboard made of stainless steel
- Compact version with a key pitch of only 16 mm in comparison to 19 mm standard
- Protection level IP 65 (dust- and splashwater proof)
- Fulltravel keys with 3,5 mm stroke and tactile feedback
- Lasermarking Keys
- Stainless steel trackball 25 mm (static IP 65, dynamic IP 54)
- Customized solutions
- [PS/2](#) or [USB](#) interface

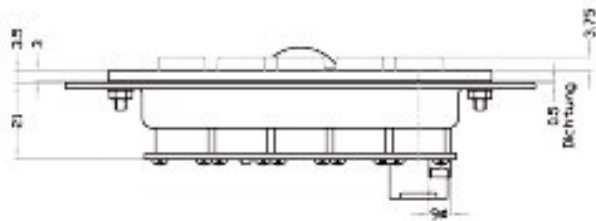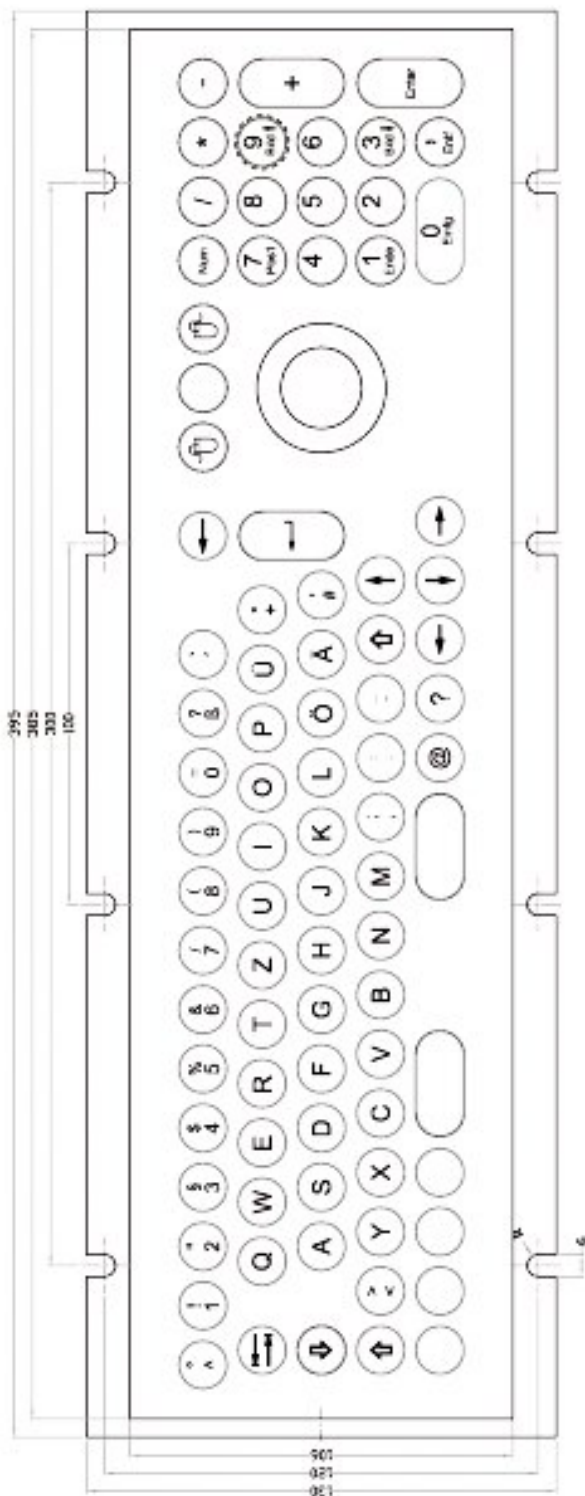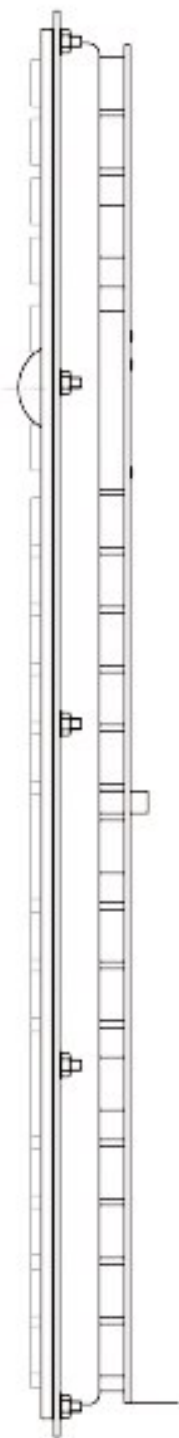

-Schrittmass = 16,4mm

Für diese Technische Zeichnung werden als Datum festgelegt:		Ab Datum:	
17.09.04		17.09.04	
Zeichner:		Gezeichnet:	
Prüfer:		Geprüft:	
Freigegeben:		Freigegeben:	
Abgeschlossen:		Abgeschlossen:	

Specification**Mechanical data**

Dimensions: 413 x 180 x 48 mm
 Degree of Protection: IP65
 Housing: Metal
 Cable Length: 180 cm

Keys

Number of Keys: 82
 Keyboard Layout: German or US or UK England
 Operational Life: 10 mio. keystrokes min.
 Actuation Force: 0,65 N
 Stroke Travel: 3,25 ± 0,25 mm
 Key Legend: Laser

Electric Data

Interface: [PS/2](#) or [USB](#)
 Operating Voltage: 5 V
 Operating Current: 50 mA

Environment

Operating Temperature: from -20 °C to +60 °C
 Storage Temperature: from -40 °C to +70 °C

Guarantee

Certifications: CE

Additional Information

layout: fullsize (strg, alt ...)

Order No.	Article	
KV1318	KVD-82-PS2-Ger	PS/2 interface, german layout
KV1319	KVD-82-USB-Ger	USB Anschluss, german layout
KV1320	KVD-82-PS2-US	PS/2 interface, US layout
KV1321	KVD-82-USB-US	USB interface, US layout
KV1322	KVD-82-PS2-UK	PS/2 interface, UK layout
KV1323	KVD-82-USB-UK	USB interface, UK layout

sales@www.tastaturen.com Anrufen: (0 89) 89 43 99-0 Faxen: (0 89) 89 43 99-11